

# ANTI-STATIC BARS

## 3024 COMPACT 24 V DC IONISING BAR

The smallest available 24 V DC Static Eliminator Bar. Short, powerful and compact, with built-in electronics and all the benefits of high output, modern 24 V DC Bars. Ideal where space constraints exist.

Static neutralisation to meet the requirements of high performance machinery at close range. Integrated power supply, requires only a low voltage 24 V DC input.

- > Available in 150 mm and 200 mm lengths.
- > High voltage, increased density of emitters for close range performance.
- > Shockless, resistively coupled tungsten emitters for unlimited life.
- > 100% coverage with no dead zone. Effective length = Overall length.
- > Ideal operating range 20-50 mm.
- > LED status indication: Green = OK, Red = Fault.
- > Remote monitoring of operational status.
- > Standard M8 4-pin connector.
- > Protected against undervoltage, overload and reverse polarity.



### Specification


<b>Electrical Supply:</b>	24 V DC (21-28 V). 0.5 A current required standalone, 1 A if using remote monitor. M8 connector. The M8 x 4 core cable must be ordered separately - see cable options overleaf (p2).
<b>Remote Monitor:</b>	Uses 24 V supply to send signal to the PLC.
<b>High Voltage Supply:</b>	Up to 7.5 kV supply integrated inside Bar.
<b>Range:</b>	Ideal: 20-50 mm, Maximum: 20-150 mm.
<b>Construction:</b>	FR-ABS industrial grade extrusion and epoxy resin.
<b>Protection Classification:</b>	IP66. Fully sealed.
<b>Environment:</b>	0 to 55°C, 70% RH non-condensing.
<b>Options:</b>	90-250 V AC, Power Supply. Code: E3024-PSU.
<b>Weight:</b>	150 mm = 220 g. 200 mm = 280 g.
<b>Standards:</b>	CE

BOUSSEY CONTROL EUROPE – Stuivenbergstraat 4 – 9790 Wortegem Petegem – Belgium

☎ +32 56 905950 - 📠 + 32 56 905959

e-mail : [info@boussey-control.eu](mailto:info@boussey-control.eu) – Site Internet: [www.boussey-control.com](http://www.boussey-control.com)


## Dimensions

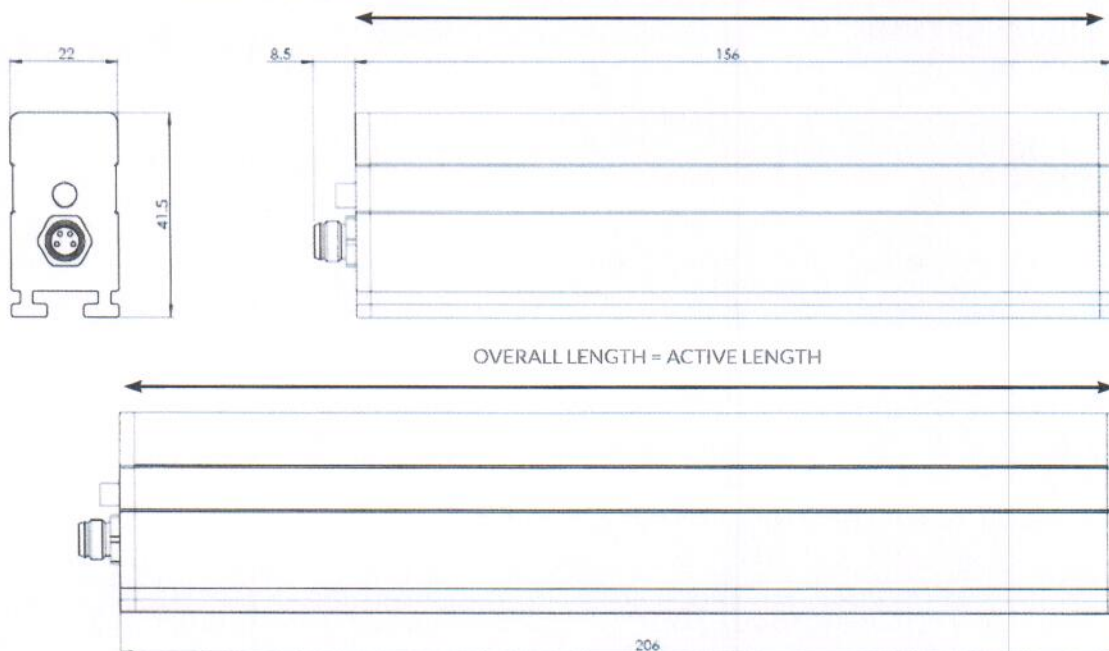

## Mounting

'T' M6 x 40 stud and flange nut. Two sliding brackets provided with each bar.

Other stud lengths are available. Please contact the manufacturer for options.

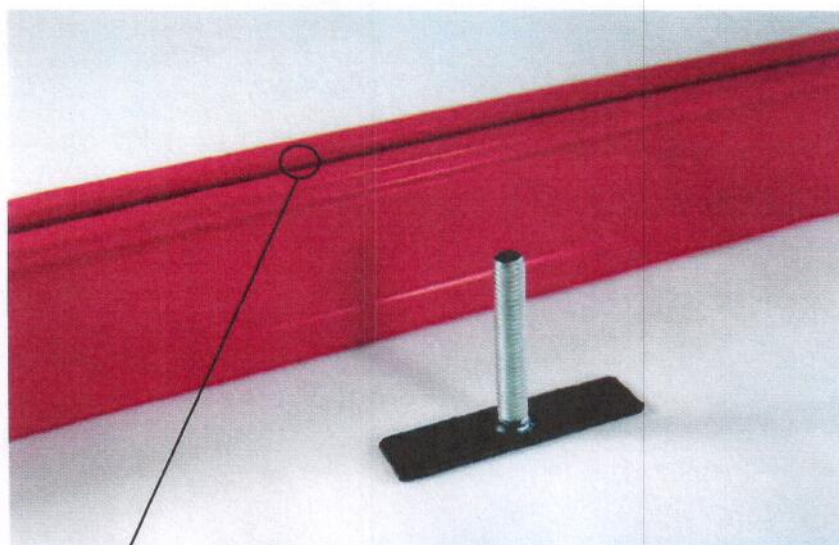

The 'T' fixing bracket slides into the slot in the bottom of the Bar.

## Accessories/Spares

Description	Part No.	Description	Part No.
3 m cable with 180° connector	80892	3 m cable with 90° connector	80933
5 m cable with 180° connector	80930	5 m cable with 90° connector	80934
7.5 m cable with 180° connector	80931	7.5 m cable with 90° connector	80935
10 m cable with 180° connector	80932	10 m cable with 90° connector	80936
Additional mounting set	30248		

Cables must be ordered separately in addition to Bar. They have standard M8 4 pin female connectors.

BOUSSEY CONTROL EUROPE – Stuivenbergstraat 4 – 9790 Wortegem Petegem – Belgium

☎ +32 56 905950 - 📠 + 32 56 905959

e-mail : [info@boussey-control.eu](mailto:info@boussey-control.eu) – Site Internet: [www.boussey-control.com](http://www.boussey-control.com)